
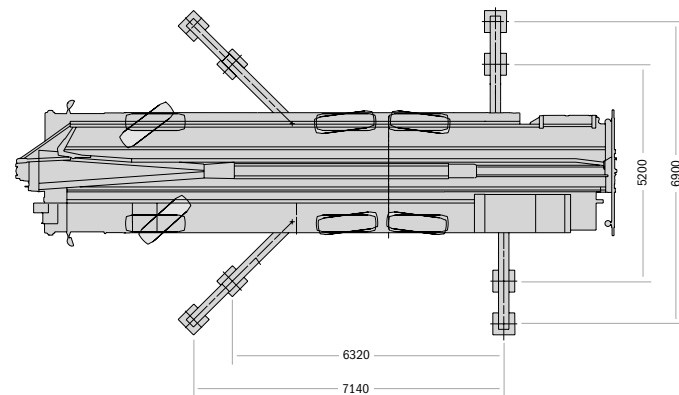


Gewicht 36 t
 Zusatzausrüstung Funksteuerung,
 Auslegerbeleuchtung

8 t

M K 63

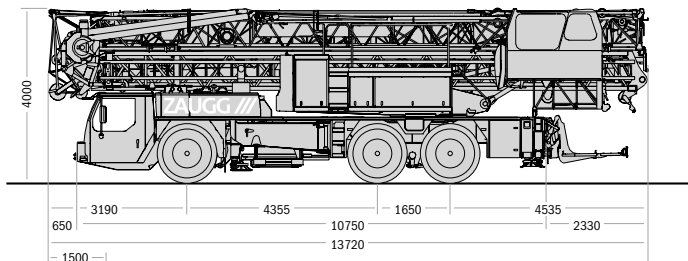

M K 63

Länge 13.72 m
 Breite 2.75 m
 Höhe 4.00 m
 Schwenkradius 3.30 m
 Abstützbreite 6.90 / 7.15 m
 Gewicht 36 t

8 t

Ausladung und Tragfähigkeit

7.14 x 6.90 m		m	m/t	m/t																
	max. 6.5 Bft (14 m/sec.)	36.0	3.5-9.0 8.0	9.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	26.5	28.0	30.0	32.0	34.0	36.0	
		26.5	3.5-10.0 8.0	8.0	8.0	6.6	5.6	4.9	4.3	3.9	3.5	3.2	2.9	2.9						

7.14 x 6.90 m		m	m/t	m/t																
	max. 8 Bft (20 m/sec.)	36.0	3.5-8.3 8.0	9.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	24.0	26.0	26.5	28.0	30.0	32.0	34.0	36.0	
		26.5	3.5-9.4 8.0	8.0	7.5	6.2	5.3	4.6	4.1	3.6	3.3	3.0	2.7	2.7						

Auslegersteilstellung

7.14 x 6.90 m		m	m/t	m/t Auslegersteilstellung 30°																
	max. 6.5 Bft (14 m/sec.)	36.0	3.5-8.0 6.0	7.0	8.0	9.0	10.0	12.0	14.0	16.0	18.0	20.0	22.0	23.1	24.0	26.0	28.0	30.0	31.3	
		26.5	3.5-9.5 6.0	6.0	6.0	6.0	5.8	5.0	4.4	4.0	3.6	3.3	3.0	2.9						

7.14 x 6.90 m		m	Auslegersteilstellung 15°				Auslegersteilstellung 45°			
max. 6.5 Bft (14 m/sec.)			m		t		m		t	
	max. 6.5 Bft (14 m/sec.)	36.0	3.5-34.7		1.8		3.5-25.8		1.8	
		36.0	3.5-25.6		1.8		3.5-19.1		1.8	

